TRIPP·LITE SmartRack™

Premium Rack Solutions

Best Value Competitive pricing reduces up-front costs. Streamlined rack enclosure cabinets save valuable IT staff time during each step of installation.

Convenient Toolless keyhole mounting makes installing PDUs and cable managers quick and easy. Easy-view index system simplifies vertical rail adjustment.

Versatile Guaranteed compatibility with all standard 19-inch rack equipment. Multiple rack types from 2U to 48U support a wide range of applications.

Sturdy Heavy-duty steel frames support up to 3,000 pounds of equipment in place or 2,250 pounds rolling.

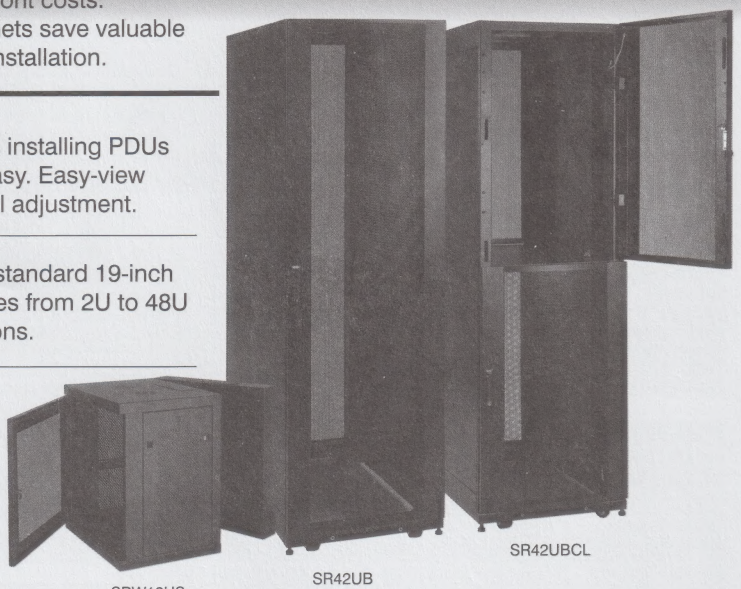

SRW12US SR42UB SR42UBCL

Rack Types (With Model Prefix or Suffix)

- **Standard (-UB Suffix)**
  Include removable doors and side panels. Ship fully assembled.
- **Expansion (-UBEXP Suffix)**
  Like standard models, but without side panels. For baying applications.
- **Colocation (-UBCL Suffix)**
  Include two secure compartments (upper and lower) and separate, lockable doors.
- **Wall-Mount (SRW- Prefix)**
  Compact enclosures and open frame racks mount to walls, on desks or under desks in locations with limited floor space. Most models include a hinged/swinging wall bracket for easy access.
- **Deep (-UBDP Suffix), Wide (-UBWD Suffix), Deep & Wide (-UBDPWD Suffix)**
  Extra width and/or depth supports deeper server cabinets and blade chassis, while keeping PDUs and cables from obstructing air[]ow.
- **Knockdown (-UBKD Suffix)**
  Ship flat in several sections for easy transport and assembly in tight spaces.
- **Shock Pallet (-UBSP1 or -UBSP2 Suffix)**
  Include pallet with 1,250 lb (SP1) or 2,000 lb (SP2) capacity and loading ramps for equipment pre-installation and reshipment to the final installation site.
- **Open Frame Racks**
  2-post and 4-post open frame racks provide economical equipment organization for applications that do not require a secure cabinet.

Model	Size	Type	Capacity
Enclosures			
SR12UB	12U	Compact	250 lb
SR25UB	25U	Standard	3,000 lb
SR25UBKD	25U	Knockdown	3,000 lb
SR25UBSP1	25U	Shock Pallet	3,000 lb
SR42UB	42U	Standard	3,000 lb
SR42UBCL	42U	Colocation	3,000 lb
SR42UBDP	42U	Deep	3,000 lb
SR42UBDPWD	42U	Deep & Wide	3,000 lb
SR42UBEXP	42U	Expansion	3,000 lb
SR42UBKD	42U	Knockdown	3,000 lb
SR42UBSP1	42U	Shock Pallet	3,000 lb
SR42UBSP2	42U	Shock Pallet (Heavy-Duty)	3,000 lb
SR42UBWD	42U	Wide	3,000 lb
SR48UB	48U	Standard	3,000 lb
SR48UBCL	48U	Colocation	3,000 lb
SR48UBEXP	48U	Expansion	3,000 lb
SR48UBKD	48U	Knockdown	3,000 lb
SR48UBSP1	48U	Shock Pallet	3,000 lb

Model	Size	Type	Capacity
Wall-Mount Enclosures			
SRW6U	6U	Non-Swinging	200 lb
SRW10US	10U	Swinging	200 lb
SRW12US	12U	Swinging	200 lb
SRW12USG	12U	Swinging, Glass Door	200 lb
SRW12US33	12U	Swinging, Deep, Heavy-Duty	250 lb
SRW18US	18U	Swinging, Heavy-Duty	250 lb
SRW26US	26U	Swinging, Heavy-Duty	250 lb
Open Frame Racks			
SR2POST	45U	2-Post Rack	800 lb
SR2POST25	25U	2-Post Rack	800 lb
SR4POST	45U	4-Post Rack	1,000 lb
SR4POST13	13U	4-Post Rack	1,000 lb
SR4POST25	25U	4-Post Rack	1,000 lb
SR42UBEXPND	42U	4-Post Rack (Heavy-Duty)	3,000 lb
Wall-Mount Open Frame Racks			
N060-002	2U	Swinging	17 lb
N060-004	4U	Swinging	35 lb
SRWO8U	8U	Non-Swinging	150 lb
SRWO12US	12U	Swinging	150 lb
SRWO20U	20U	Non-Swinging	150 lb

See Reverse for Tripp Lite's Full Line of Rack Accessories

For More Information, Contact Your Tripp Lite Representative

TRIPP·LITE
POWER PROTECTION

1111 W. 35th Street • Chicago, IL 60609 • 773.869.1234 • www.tripplite.com

TRIPP·LITE Rack Accessories

Tripp Lite Rack Accessory Compatibility Matrix

Model	Description	Compatibility: 2-Post Open Frame Racks	4-Post Open Frame Racks	Wall-Mount Solutions	25/42/48U Enclosures
Airflow Management Accessories / Cooling Solutions & Accessories					
SR1UBRUSH	1U Cable Pass-Through Panel with Brush Strip (Brush strip blocks unwanted airflow.)	✓	✓	✓	✓
SR1UPANEL10	1U Blanking Panel Kit (10 pieces; toolless mounting.)		✓	✓	✓
SR1UPANEL50	1U Blanking Panel Kit (50 pieces; toolless mounting.)		✓	✓	✓
SRCOOL12K	12,000 Btu, 120V, 60Hz Compact Air Conditioning Unit (Includes install kit; maintenance-free.)	✓	✓	✓	✓
SRXCOOL12K	12,000 Btu, 230V, 50Hz Compact Air Conditioning Unit (Includes install kit; maintenance-free.)	✓	✓	✓	✓
SRCHIMNEY	Convection Heat Removal Unit (Replaces rear doors. Includes standards-compliant duct kit.)				42/48U*
SRFANCHIMNEY	Fan-Assisted Heat Removal Unit (208-240V. Replaces rear doors. Includes 4 high-performance fans, intake/exhaust temperature meters and standards-compliant duct kit.)				42/48U*
SRFAN3U	3U Fan Panel – 120V (3 fans; 210 CFM; 5-15P plug.)	✓	✓	✓	✓
SRXFAN3U	3U Fan Panel – 230V (3 fans; 210 CFM; C14 inlet.)	✓	✓	✓	✓
SRFANROOF	Roof-Mounted Fan Panel – 120V (6 fans; 420 CFM; 5-15P plug; toolless mounting.)				✓
SRXFANROOF	Roof-Mounted Fan Panel – 230V (6 fans; 420 CFM; C14 inlet; toolless mounting.)				✓
SRGASKET	Airflow Optimization Kit (Prevents recirculation of warm air through side gaps.)				✓
SRSKIRT	Rack Enclosure Skirt Kit (Brush strip blocks unwanted airflow at bottom.)				✓
Cable Management Accessories					
P350-10N-10	10-Pack of 10 in. x 5/8 in. Hook-and-Loop Cable Ties.	✓	✓	✓	✓
PDUMVROTATEBRKT	Bracket allows vertical PDU outlets to face the rear of the rack enclosure for improved access and airflow. Included with vertical Monitored and Switched PDUs.	✓	✓	✓	✓
SRCABLEDUCT1U	1U Horizontal Cable Manager (Finger duct with cover.)	✓	✓	✓	✓
SRCABLEDUCTVRT	6 ft Vertical Cable Manager (Finger duct with cover; toolless mounting.)	✓	✓		✓
SRCABLELADDER	10 ft x 1 ft Cable Ladder (Includes 2 sections; requires SRCABLETRAY for connection to enclosure; requires SRLADDERATTACH for connection to wall or open frame rack.)	✓	✓		✓
SRCABLERING1U	1U Horizontal Cable Manager (Flexible ring type.)	✓	✓	✓	✓
SRCABLERING2U	2U Horizontal Cable Manager (Flexible ring type.)	✓	✓	✓	✓
SRCABLERINGVRT	6 ft Vertical Cable Manager (Flexible ring type; toolless mounting.)	✓	✓		✓
SRCABLETRAY	Roof-Mounted Cable Trough (Provides cable routing and power/data cable segregation.)				✓
SRCABLETRAYEXP	Roof-Mounted Cable Trough – Vertical Expansion (Requires SRCABLETRAY.)				✓
SRCABLEVRT6	High-Capacity Vertical Cable Manager (6 in. wide; double finger duct with cover; toolless mounting.)	45U	45U		42/48U
SRCABLEVRT12	High-Capacity Vertical Cable Manager (12 in. wide; double finger duct with cover; toolless mounting.)	45U	45U		42/48U
SRLADDERATTACH	Connects SRCABLELADDER to a wall, 2-post open frame rack or 4-post open frame rack.	✓	✓		
Security & Monitoring Accessories					
B020-008-17	Rack Console KVM with 17 in. color LCD and 8-port switch. (PS/2 or USB. Requires cable kits.)	Add B019-000	✓	✓	✓
B020-016-17	Rack Console KVM with 17 in. color LCD and 16-port switch. (PS/2 or USB. Requires cable kits.)	Add B019-000	✓	✓	✓
B021-000-17	Rack Console with 17 in. color LCD. Includes PS/2 cable kit.	Add B019-000	✓	✓	✓
B021-000-19	Rack Console with 19 in. color LCD. Includes PS/2 and USB cable kit.	Add B019-000	✓	✓	✓
B040-008-19	Rack Console KVM with 19 in. color LCD and 8-port switch. (PS/2 or USB. Requires cable kits.)	Add B019-000	✓	✓	✓
B040-016-19	Rack Console KVM with 19 in. color LCD and 16-port switch. (PS/2 or USB. Requires cable kits.)	Add B019-000	✓	✓	✓
ENVIROSENSE	Connects to SNMPWEBCARD or Monitored/Switched PDUs for remote monitoring of temperature and humidity. Also monitors and controls devices that support contact closure communications. Can monitor up to three additional sensors.	✓	✓	✓	✓
RELAYIOCARD	Adds programmable contact closure interface to compatible UPS systems. Includes six outputs and one input.	✓	✓	✓	✓
SNMPWEBCARD	Adds Ethernet interface to compatible UPS systems for remote monitoring and control via SNMP, Web or telnet.	✓	✓	✓	✓
SRCOMBO	Door Handles with Combination Lock (2-pack for front and rear doors; includes bypass key.)				✓
SRSWITCH	Magnetic Door Switch Kit (2-pack for front and rear doors; requires ENVIROSENSE.)			✓	✓
Shelves					
SRSHELF2P	2U Cantilever Fixed Shelf (60 lb capacity; 18 in. depth.)	✓	✓		✓
SRSHELF2P1U	1U Cantilever Fixed Shelf (50 lb capacity; 12 in. depth.)	✓	✓	✓	✓
SRSHELF4PHD	Heavy-Duty Fixed Shelf (250 lb capacity; 26 in. depth.)		✓		✓
SRSHELF4PKYBD	Keyboard Shelf (25 lb capacity; 16 in. depth.)		✓		✓
SRSHELF4PSL	Standard Sliding Shelf (50 lb capacity; 26 in. depth.)		✓		✓
SRSHELF4PSLHD	Heavy-Duty Sliding Shelf (100 lb capacity; 26 in. depth.)		✓		✓
Mounting & Power Accessories					
2POSTRMKITHD	Heavy-Duty 2-Post Rackmount Kit for 2U to 4U UPS Systems and Battery Packs.	✓			
2POSTRMKITWM	2-Post Rackmount Kit for 2U to 4U UPS Systems and Battery Packs.	✓			
4POSTRAILKIT	4-Post Rack Rail Kit (Supports rackmount equipment cabinets up to 250 lb.)		✓	✓	✓
B019-000	2-Post Rackmount Kit for B020-, B021-, B040- and B070-Series Consoles and Console KVMs.	✓			
SRBOLTDOWN	Bolt-Down Kit (Secures included stabilizing brackets or optional stabilizing plates to facility floor.)	✓	✓		✓
SRCAGENUTS	Square Hole Hardware Kit (Includes 50 cage nuts, screws and washers.)		✓	✓	✓
SRCASTER	Heavy-Duty Rolling Caster Kit (Includes 4 casters. Casters are included with 25/42/48U enclosures.)		✓	✓	✓
SREXTENDER	Rack Enclosure Extension Frame (Increases maximum mounting depth to 43.75 in.)				42/48U*
SRGROUND	0U Grounding Kit.	✓	✓		✓
SRSCREWS	Threaded Hole Hardware Kit (Includes 50 #12-24 screws and washers.)	✓			
SRSTABILIZE	Anti-Tip Stabilizing Plate Kit (Provides extra stability for standalone enclosures.)				✓
SUDC208V42P	42-Pole Power Distribution Center (Breaker box securely housed in 42U enclosure cabinet. 3-phase input. 3-phase and/or single-phase output. Requires output breakers and power distribution cord sets, sold separately.)	✓	✓	✓	✓
UPSHDEARKIT	Heavy-Duty Mounting Ear Kit (Supports 2U equipment cabinets up to 65 lb from front vertical rails.)	✓	✓	✓	✓

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. All trademarks are the sole property of their respective owners. * Compatible with standard enclosures only.

For More Information,
Contact Your Tripp Lite Representative

TRIPP·LITE POWER PROTECTION

1111 W. 35th Street • Chicago, IL 60609
773.869.1234 • www.tripplite.com

201002014 95-3123